


TECHNICAL DATA SHEET

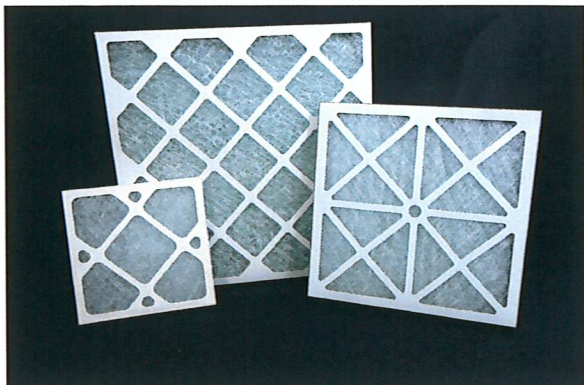

Glass Panel

Description

Disposable glass fibre panel filter in card frame

Suggested Applications

Pre-filtration for air conditioning applications

Technical Data

(based on nominal 24x24x2" size)

Filter Media Type	Glass Fibre
Av Arrestance (DIN 24185/BS 6540)	80-90 %
Nominal Air Volume	2000 m ³ /h
Initial Pressure Drop	35 Pa
Final Pressure Drop	250 Pa
Filter Classification (EN779:2012)	G3 Grade
Filter Classification (ISO 16890)	Coarse 65%
Maximum Operating Temperature	80 °C
Maximum Relative Humidity	100 %
Flammability	UL900 Class 2

☐ Head Office:

39 Moorbridge Road Industrial Estate
Bingham, Notts NG13 8GG
tel: 01949-485400
fax: 01949-485401
email: sales@midfilters.co.uk

☐ Scottish Branch:

28-30 Carron Place
East Kilbride G75 0YL
tel: 01355-267730
fax: 01355-267811
email: scotland@midfilters.co.uk

VAT Registered No. 416 3203 90
Registered in England No. 1936235

