




TECHNICAL DATA

G4 HIGH CAPACITY PLEATED PANEL FILTER

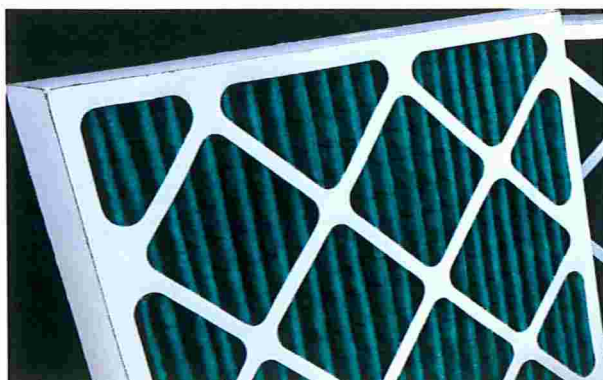

Nominal Size (mm)	Rated Air Flow (m ³ /hr)			Initial Pressure Drop (Pa)		
	22mm	47mm	98mm	22mm	47mm	98mm
400 x 500	1400	1870	2380	65	70	80
500 x 500	1780	2360	2950	65	70	80
400 x 625	1760	2350	2940	65	70	80
500 x 625	2200	2950	3700	65	70	80
300 x 600	1230	1700	2125	65	70	80
600 x 600	2560	3400	4250	65	70	80

Technical Data

Classification to EN779:	G4
Classification to ISO16890:	Coarse 70%
Final Pressure Drop:	200 Pascal
Frame construction:	Heavy duty moisture resistant card casing
Media construction:	Profile pleated synthetic media laminated onto expanded metal grid, this treated to prevent oxidation
Media area (600x600x47)	1.7m²
Maximum temperature:	80° C
Maximum humidity:	100%
Flammability (DIN 53438-3)	F1 Class

MIDLAND *filtration* Limited

Head Office:

39 Moorbridge Road Industrial Estate
Bingham, Notts NG13 8GG
tel: 01949-485400
fax: 01949-485401
email: sales@midfilters.co.uk

Scottish Branch:

28-30 Carron Place
East Kilbride G75 0YL
tel: 01355-267730
fax: 01355-267811
email: scotland@midfilters.co.uk

VAT Registered No. 416 3203 90
Registered in England No. 1936235

