


TECHNICAL DATA

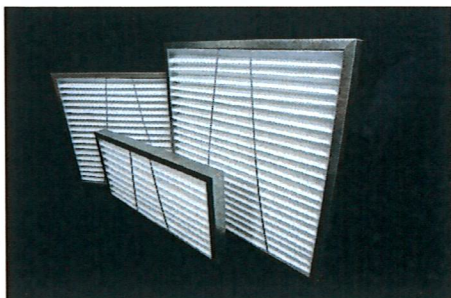

G4 METAL CASED PLEATED PANEL FILTERS

Actual Size (mm)	Rated Air Flow (m ³ /hr)		
	20mm	45mm	95mm
292 x 292	460	614	798
292 x 594	937	1249	1623
368 x 368	731	975	1268
368 x 495	984	1312	1705
394 x 495	1053	1404	1825
394 x 622	1323	1764	2294
445 x 445	1069	1426	1854
495 x 495	1323	1764	2293
495 x 594	1588	2117	2752
495 x 622	1663	2217	2882
594 x 594	1905	2540	3303

INITIAL PRESSURE DROP: 20MM - 26Pa,

45mm - 35Pa, 95mm - 50Pa

RECOMMENDED FINAL RESISTANCE – 250Pa

FRAME	galvanised steel with rolled safety edges, wire clips on faces
MEDIA	G4 (ISO 16890 Coarse 80%) grade pleated hydrophobic, electrostatically charged continuous fibre with wire mesh backing
ASHRAE	Merv 8 rating – 52.2 test standard

MIDLAND
filtration
L i m i t e d

☐ **Head Office:**

39 Moorbridge Road Industrial Estate
Bingham, Notts NG13 8GG
tel: 01949-485400
fax: 01949-485401
email: sales@midfilters.co.uk

☐ **Scottish Branch:**

28-30 Carron Place
East Kilbride G75 0YL
tel: 01355-267730
fax: 01355-267811
email: scotland@midfilters.co.uk

VAT Registered No. 416 3203 90
Registered in England No. 1936235

